
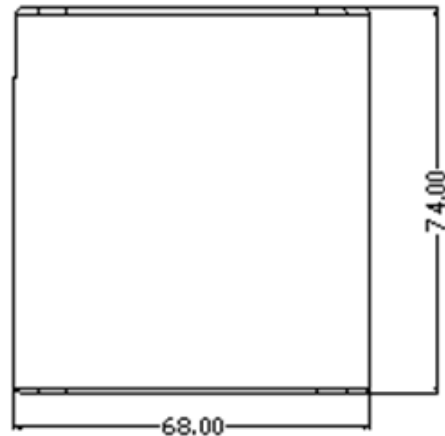


GP Batteries

Product Specification

Model no.: B421

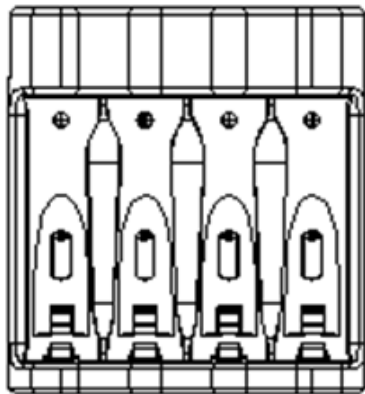

| | | |
|-----------------------------|---|---|
| Product Name | : | USB 4-Slot Charger B421 |
| Input | : | DC5V 1A |
| Charging Channels | : | 2 independent channels ; 2 slots/channel for 2 or 4 pcs AA/AAA NiMH batteries |
| Output Voltage | : | 2.8V |
| Charging Current | : | 400mA approx for AA ; 320mA approx AAA Ni-MH Batteries |
| Charging Time | : | Approx. 360 Min for 2000mAh ; Approx. 180 Min for 800mAh |
| Trickle Charging Current | : | 50mA approx for AA/AAA Ni-MH batteries |
| Standby current at no input | : | <0.1mA |
| Operation Temperature | : | 0°C to 35°C |
| LED Indication | : | Green LED ON for 0.5 second after just USB power input Charging in progress - Green LED slow flashing Fully charged – Green LED ON Bad/Primary Batteries inserted – Green LED fast flash |
| Safety protection | : | 1) Timer protection – 8 hours 2) -dv |
| Dimensions | : | 68 (L) x 74 (W) x 21.3 (H) mm |
| Weight | : | 40 g (approx.) |
| Certification | : | CE, FCC, Rohs |
| Warranty Period | : | 12 months from ex-factory date |



Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.